

Standard Centrifugal

## SC1212C17L72



Typical Pump Configuration

### Performance

#### End suction standard centrifugal pump

Bare shaft, frame mounted, heavy duty pump

Size	12" x 12" 300 x 300 mm
Flow, Max	11,500 USgpm 2650 m <sup>3</sup> /h 730 l/s
Head, Max	320 feet 100 meters
Flow at BEP	9,500 USgpm 2200 m <sup>3</sup> /h 600 l/s
Efficiency at BEP	82%
Solids Handling, Max	2.3" 58 mm
Operating Speed, Max	1800 rpm
Suction Connection	12" (300 mm) 150 ANSI Flanges
Delivery Connection	12" (300 mm) 150 ANSI Flanges
Bearing Lubrication	Oil STD Grease optional
Fasteners	Imperial

### Applications

Quarry	Firefighting
Dust Suppression	Steel
Mining	Oil & Gas

### High pressure, high flow, heavy duty pump

Designed to operate over a broad range of performance while delivering outstanding suction lift, the SC1212C17 is the clear choice. The rugged construction and modular design provide proven reliability and flexibility in the most demanding applications.

### Optional Priming System

Priming System	Mechanically Driven Diaphragm Style Vacuum Pump
Air Removal Capability	50 CFM
Priming Chamber	Single chamber with positive sealing air separation PosiValve™ with stainless steel float ball & linkage.
Discharge Check Valve	Swing Style - ductile iron with Buna-n Disc

### Other Specifications

Mechanical Seal	Single Type Seal w/ Tungsten Carbide vs. Silicon Carbide Seal Faces, Viton Elastomers, 300 Series Stainless Steel Hardware and Spring (Run Dry Option Available).
Pump End Bearing	Single row ball
Drive End Bearing	Double Row Angular Contact
Shaft	17-4 PH Stainless Steel

### Construction Materials


	Standard Construction	CD4MCu Stainless Steel
Impeller	Ductile Iron	CD4MCu
Volute	Ductile Iron ASTM A536 65-45-12	CD4MCu
Wear Ring	ASTM A48 Class 40 Gray Iron	316 SS
Suction Cover	Ductile Iron ASTM A536 65-45-12	CD4MCu
Bracket	Ductile Iron ASTM A536 65-45-12	CD4MCu
Backplate	Ductile Iron ASTM A536 65-45-12	CD4MCu

# Mechanical Dimensions



Typical Pump Configuration

## SC1212C17

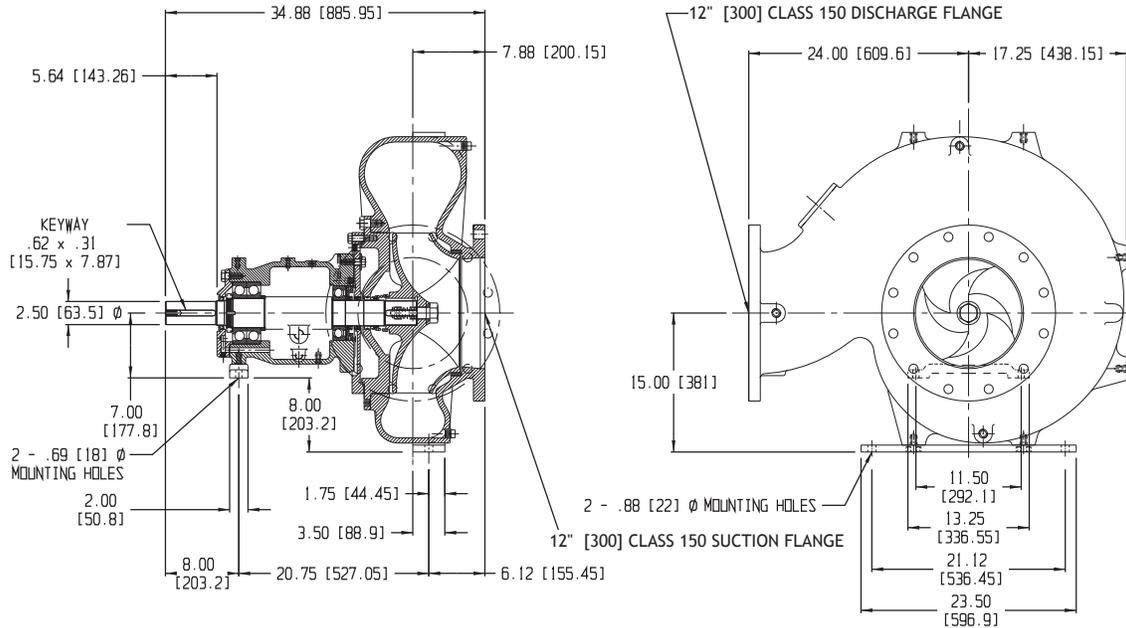

# Performance Curve

Model: SC1212C17	Impeller Dia: 17.25"	Speed: Variable	Solids Size: 2.25"	Curve #07999HQ
------------------	----------------------	-----------------	--------------------	----------------

