




Performances shown for clear water at S.G. 1.0 and 70°F (21°C). PP (Pioneer Prime) pumps include additional losses from the check valve and vacuum pump. SC (Standard Centrifugal) pumps have no additional losses.

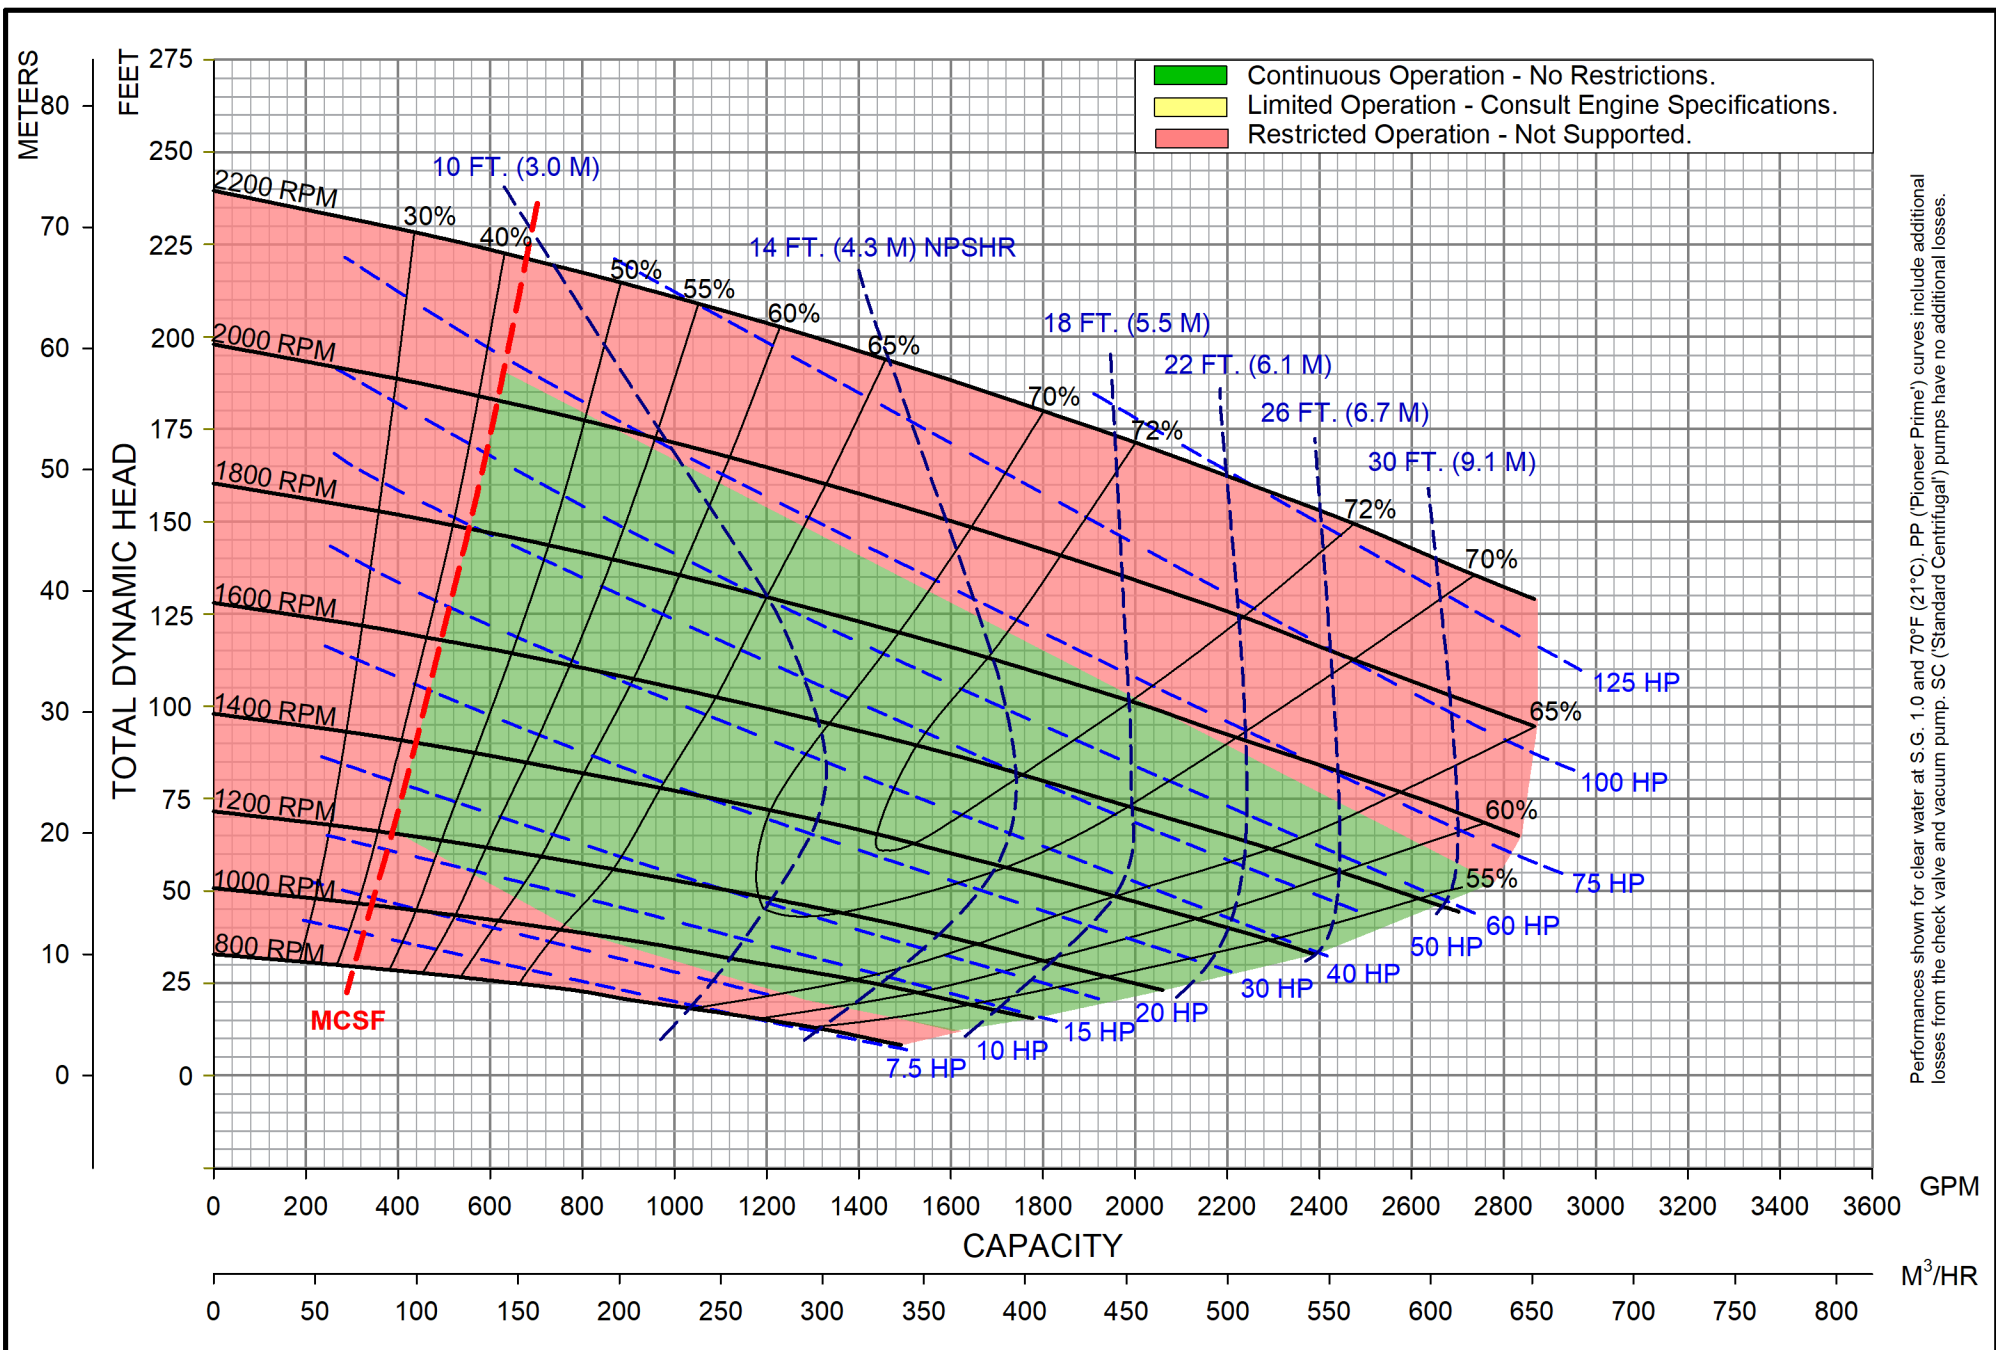

Type: Solids

Engine: JD - 4045TFC03 - FT4

Model: PP66S12

Impeller Diam: 12"

Style: Enclosed

Suction: 6"

Solids Dia: 3"

CURVE NO: 20661HQ

Vane Count: 2

Volute: Single

Discharge: 6"

N_s: 2326

000

8/18/20

KDH